


ASSEMBLY DIAGRAM

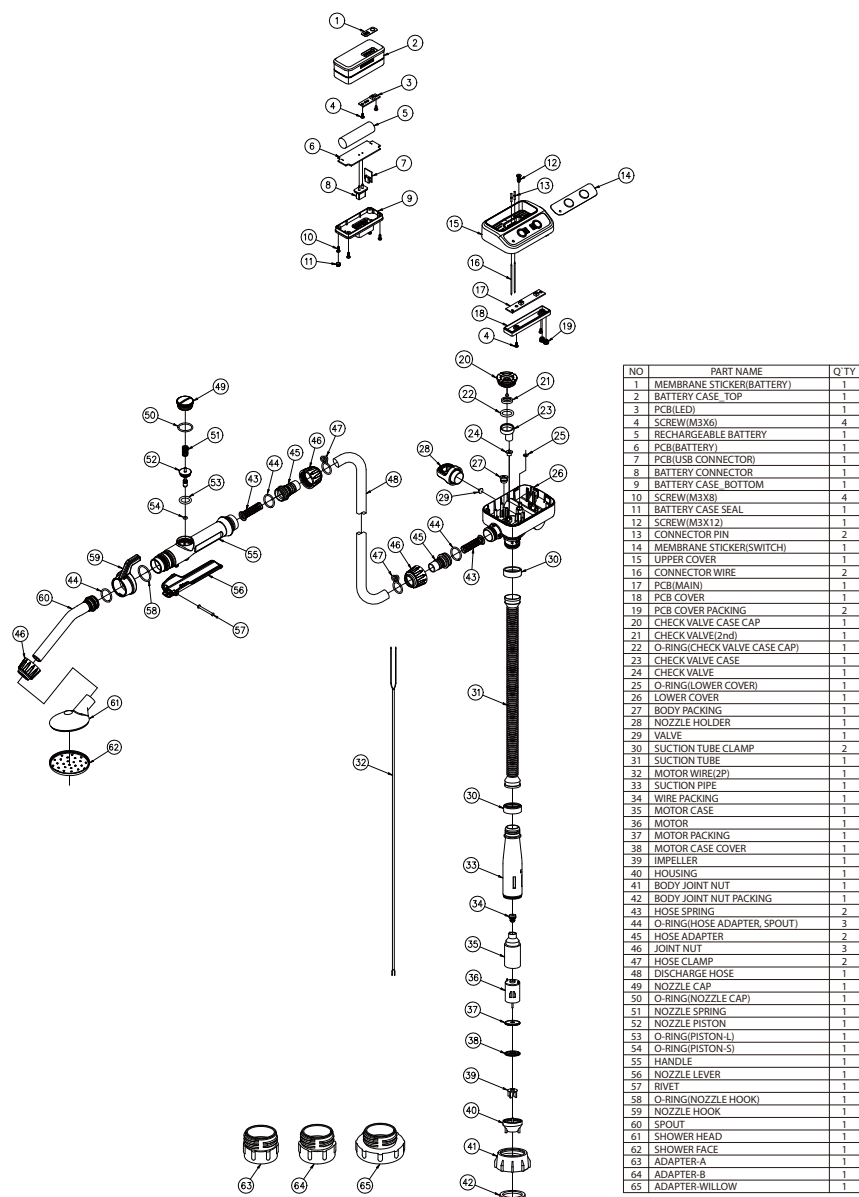


* Specifications are subject to change without notice.

EASY WATER PRO

INSTRUCTIONS AND PRECAUTIONS

※ Read all instructions and precautions before use.

MODEL: EF-13-WM-RB

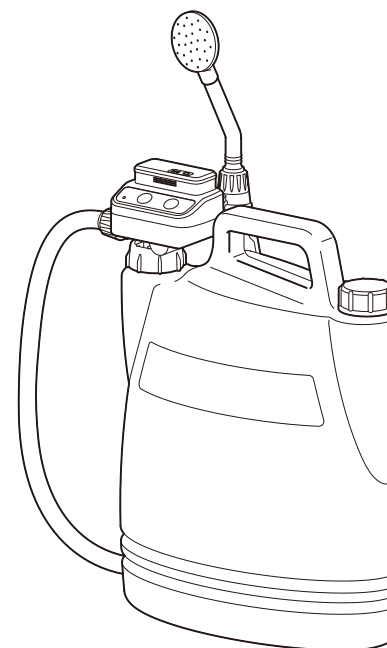

www.easyflo.com.au

Precautions for Use

These instructions are to ensure the product is used correctly, safely, and to prevent any possible risk or damage to the user and/or others people. Our company shall not take any responsibility for any failure of product, malfunction and damages caused by improper use by the user or third parties.

DANGER

If the directions of this sign are not followed, fatal accidents can happen and the user may die or get seriously injured.

WARNING

If the directions of this sign are not followed, accidents can happen or the user can get injured.

CAUTION

If the directions of this sign are not followed, the product can get damaged or the user can get injured.

DANGER

Only use for watering.

Do not use this pump for transferring the following liquids: Gasoline, Diesel, Water soluble fertilizers, Flammable liquids, Detergents, Kerosene, Acetone, Benzene, Cresol, Ethyl, Phenol, Methyl ethyl, Concentrated caustic soda liquid, Nitric acid, Hydrochloric acid, Sulfuric-acid, thinner or solvents, Etc.

WARNING

Do not allow children to operate the product without adult supervision.

When disposing of pump, make sure to have it completely destroyed so that others won't use it again.

When you hand it over to another person, be sure to give them the instructions too.

If battery temperature is over 60°C (140°F), system will not work to protect the battery. In this case, take the battery out of the pump and keep cool in well-ventilated area.

CAUTION

After using the pump, do not keep it on its side or upside down.

Do not alter or disassemble the pump.

Do not run the pump 'dry' or let the pump idle without transferring.

Make sure to turn off the power after using the pump.

Do not shock the pump.


Use clean water only. Dirty water may cause mal function and/or pump failure.

Do not use this pump for hot liquids above 40°C (104°F).

Do not place the pump in a wet area.

When cleaning up the pump, do not use thinner, benzene, organic solvent, or glass cleaners.


Names of Parts

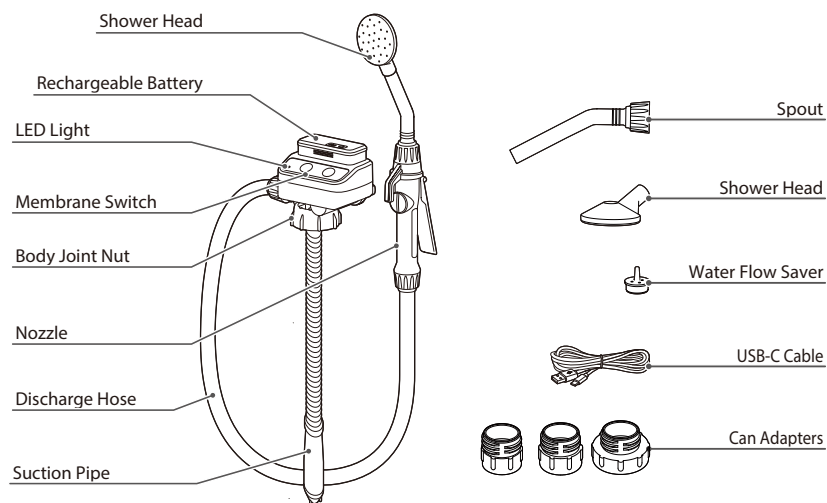


Specifications

Delivery volume	Approx. 8.5 LPM (2.2 GPM)	Operating temperature	+5°C ~ 40°C (41°F ~ 104°F)
Suction tube length	Approx. 400mm (16")	Operating voltage	DC3.7V
Discharge hose length	Approx. 2.15m (7ft)	Power source	Rechargeable Li-ion Battery

Directions for Use

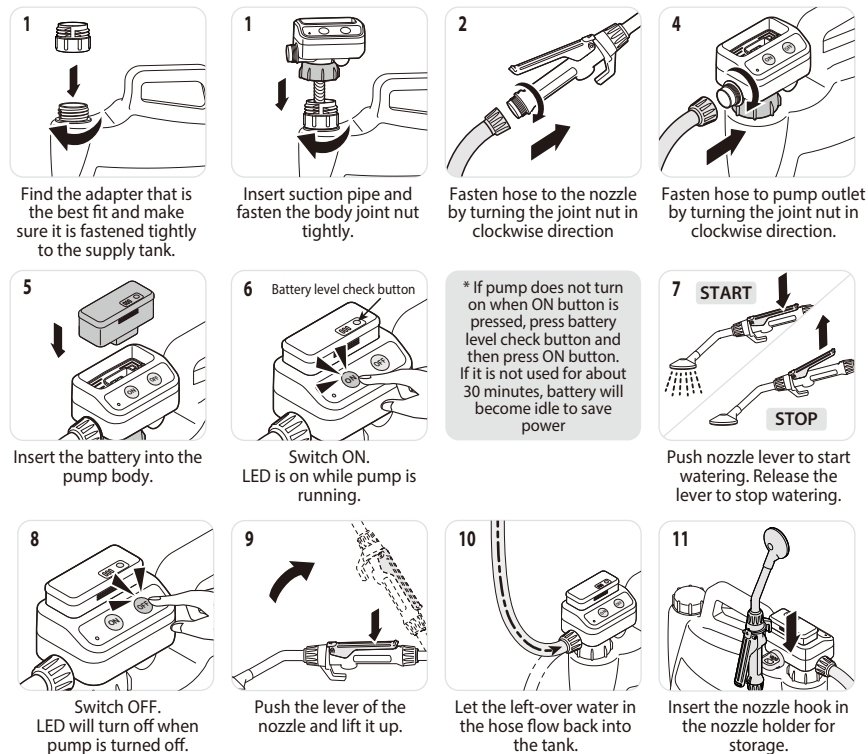

How to use flow controller

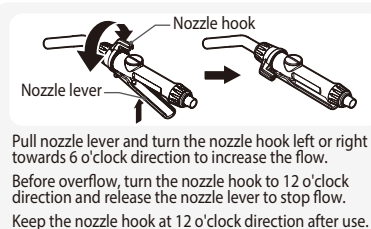

CAUTION!

