


ASSEMBLY DIAGRAM

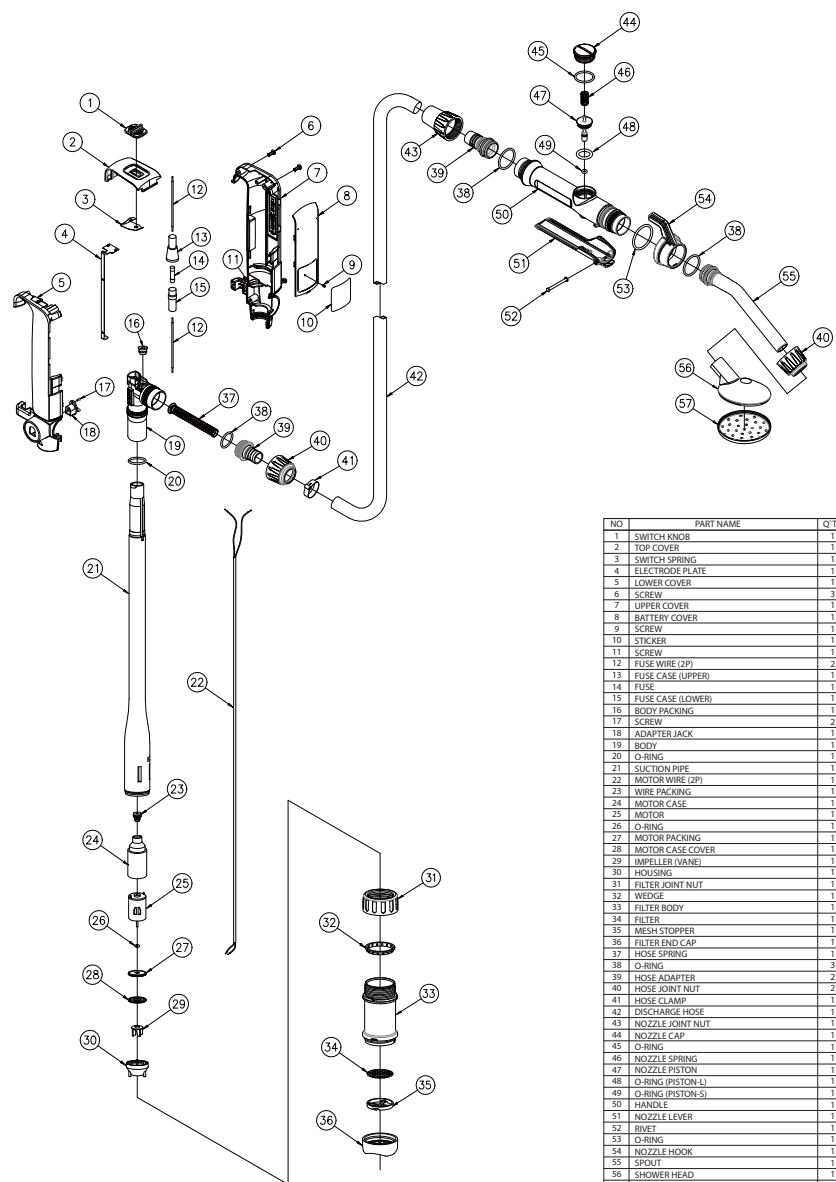

NO	PART NAME	QTY
1	SWITCH KNOB	1
2	TOP COVER	1
3	SWITCH SPRING	1
4	ELECTRODE PLATE	1
5	LOWER COVER	1
6	SCREW	3
7	UPPER COVER	1
8	BATTERY COVER	1
9	SCREW	1
10	STICKER	1
11	SCREW	1
12	FUSE WIRE (2P)	2
13	FUSE CASE (UPPER)	1
14	FUSE	1
15	FUSE CASE (LOWER)	1
16	BODY PACKING	1
17	SCREW	2
18	ADAPTER JACK	1
19	BODY	1
20	O-RING	1
21	SUCTION PIPE	1
22	MOTOR WIRE (2P)	1
23	WIRE PACKING	1
24	MOTOR CASE	1
25	MOTOR	1
26	O-RING	1
27	MOTOR PACKING	1
28	MOTOR CASE COVER	1
29	IMPELLER (VANE)	1
30	HOUSING	1
31	FILTER JOINT NUT	1
32	WEDGE	1
33	FILTER BODY	1
34	FILTER	1
35	MESH STOPPER	1
36	FILTER END CAP	1
37	HOSE SPRING	1
38	O-RING	3
39	HOSE ADAPTER	2
40	HOSE JOINT NUT	2
41	HOSE CLAMP	1
42	DISCHARGE HOSE	1
43	NOZZLE JOINT NUT	1
44	NOZZLE CAP	1
45	O-RING	1
46	NOZZLE SPRING	1
47	NOZZLE PISTON	1
48	O-RING (PISTON-L)	1
49	O-RING (PISTON-S)	1
50	HANDLE	1
51	NOZZLE LEVER	1
52	INLET	1
53	O-RING	1
54	NOZZLE HOOK	1
55	SPOUT	1
56	SHOWER HEAD	1
57	SHOWER COVER	1

• Specifications are subject to change without notice.


ELECTRIC PUMP

INSTRUCTIONS AND PRECAUTIONS

※ Read all instructions and precautions before use.

MODEL: EF-15N-12V-3

US D755,925 D777,007
EU 002681833-0001/002
JP 1534487 1538043

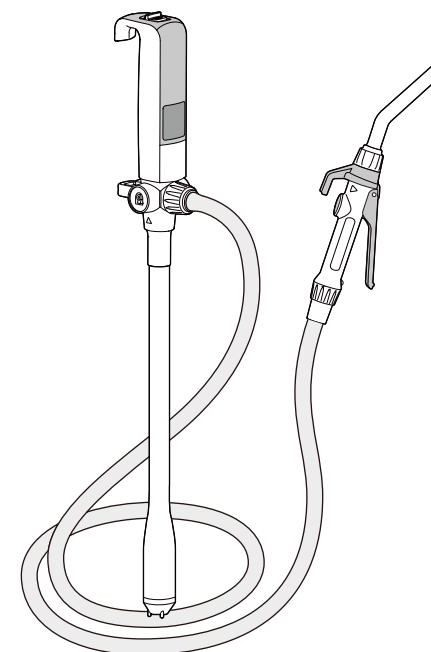

www.easyflo.com.au

Precautions for Use

These instructions are to ensure the product is used correctly, safely, and to prevent any possible risk or damage to the user and/or others people. Our company shall not take any responsibility for any failure of product, malfunction and damages caused by improper use by the user or third parties.

DANGER

If the directions of this sign are not followed, fatal accidents can happen and the user may die or get seriously injured.

WARNING

If the directions of this sign are not followed, accidents can happen or the user can get injured.

CAUTION

If the directions of this sign are not followed, the product can get damaged or the user can get injured.

DANGER

Do not use for concentrated acids.

Only use on applicable liquids written on the specifications.

DO NOT use this pump for transferring the following liquids : acetone, benzene, cresol, ethanol, phenol, butanone, concentrated caustic soda liquid, nitric acid, hydrochloric acid, sulfuric acid, thinner, solvents, etc.

WARNING

Do not refuel directly while the vehicle or equipment is turned on.

Do not leave the pump unattended.

Do not bend, bind or pull the power cord by force.

Make sure to use the pump on even surface.

Do not allow children to operate the product without adult supervision.

When using with a kerosene heater-
*Always turn heater off and allow cool before refueling.
*Always fuel heater outdoors and clean up any spills.

CAUTION

After using the pump, do not keep it on its side or upside down.

Make sure to remove any left-over liquid in the discharge hose after each use.

Do not alter or disassemble the pump.

Do not run the pump 'dry' or let the pump idle without transferring.

Make sure to turn off the power after using the pump.


Do not shock the pump.

Do not use deteriorated or contaminated liquids and fuels.

Do not place the pump in a wet area.

Do not use this pump for hot liquids above 40°C (104°F).


Names of Parts

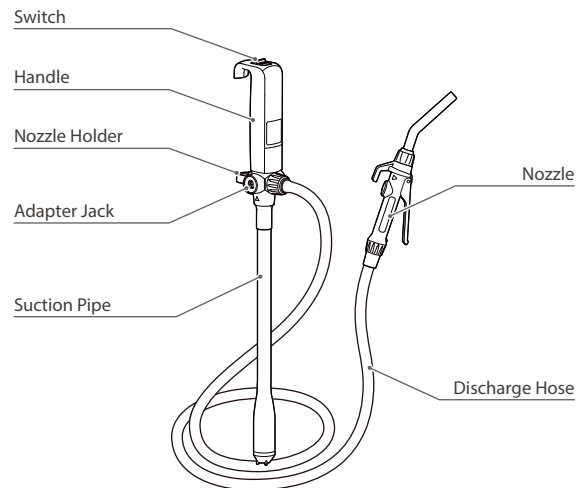


Specifications

Delivery volume	Approx. 9 LPM (2.4 GPM)	Operating temperature	+5°C ~ 40°C (41°F ~ 104°F)
Suction pipe length	Approx. 380~520mm (15" ~ 20.5")	Power Source	12VDC, 2A
Discharge hose length	Approx. 3m (9.8ft)	Duty Cycle (how long can the pump be used continuously)	Maximum 15 minutes on, Minimum 30 minutes off
Applicable liquids	Petrol, Diesel, Kerosene, DEF(AdBlue), Antifreeze, Windshield washer fluid, Agricultural chemicals, Non-potable water		

Directions for Use

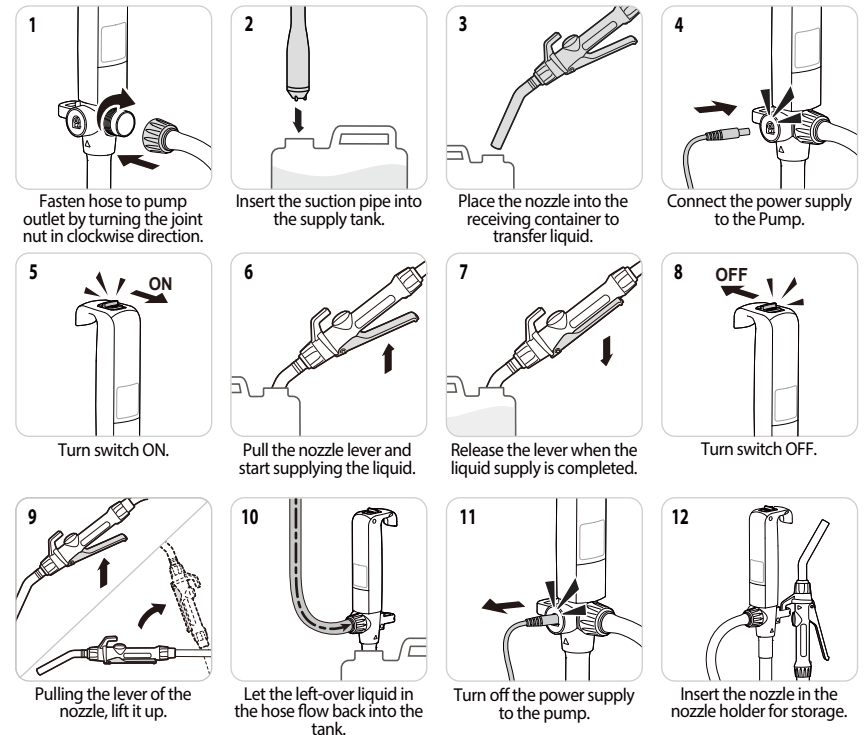

How to use flow controller

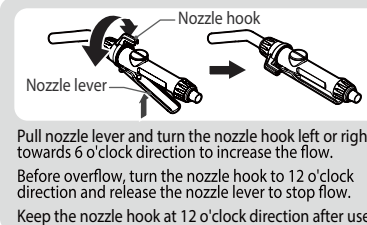

CAUTION!

